


PARTS QUANTITY	DESCRIPTION									
2	Sides									
2	Feet									
2	Caster Bases									
2	Bases									
2	Angle Adjustable Shelf Sides									
1	Shelf Deck									
24	Confirmat Screws									
16	3/4" Black Screws (for caster assembly)									
8	Cap Nuts w/Bolts									
12	7/16" Zinc Plated Screws (for mounting rack rails)									
	MA 10, MA 12R, MA 14R									
10	7/16" Zinc Plated Screws (for mounting rack rails)									
	MA 16R									
2	Rack Rails									
4	Casters									
	MA 12R, MA 14R, MA 16R									
	Tool List									
1	4mm Hex Key									

### **Confirmat Screws**






## 7/16" Zinc Plated Screws



### Cap Nuts w/Bolts



### Rack Rail

0	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0 0
0	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0	010	0 0

#### Casters






ProRak

Multi-Angle **Rolling Rack** 








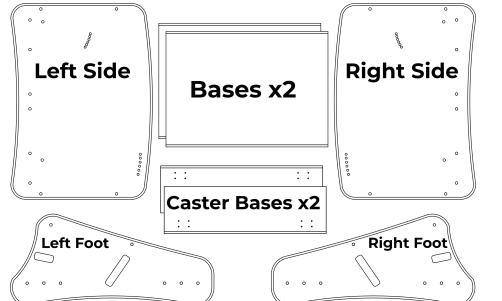

## Diagram reference for steps 2 and 4





Do not contact your dealer, please visit www.RABAudio.com/contact-us for parts and services.


Angle Adjustable

Shelf Side


## **ASSEMBLY Step 1 of 4**

Tools required: Philips Screwdriver

1. Lay sides on a flat surface. Align rack rails on pre-drilled holes and secure with 7/16" zinc plated screws.




 Lay caster bases on a flat surface. Align casters to pre-drilled holes and attach with 3/4" black screws.
If you have purchased the MA10 skip this step.




# **ASSEMBLY Step 2 of 4**

Tools required: Hex Key

1. Secure both bases to each racked sides with confirmat screws.

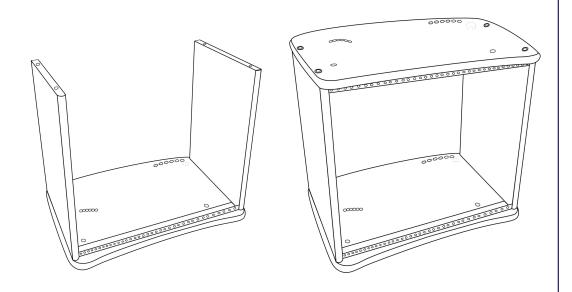


2. Secure **feet** to both **sides** using **cap nuts** and **bolts**. Reference diagram on page 2 if you need help with placement.

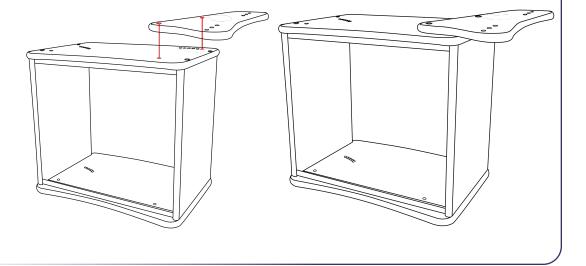


## **ASSEMBLY Step 3 of 4**

Tools required: Hex Key

1. Flip the unit upside down and attach **caster bases** to the **feet** with **confirmat screws**.

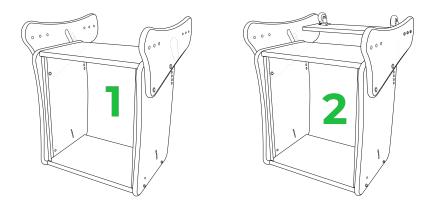

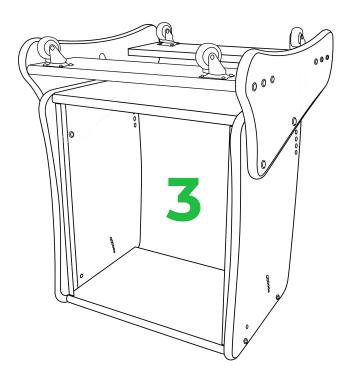



Multi-Angle

**Rolling Rack** 

## **ASSEMBLY Step 4 of 4**

Tools required: Hex Key

1. Flip the unit right side up, attach the **angle adjustable shelf sides** to each side with **cap nuts** and **bolts**.

Reference diagram on page 2 if you need help with placement.

2. Lay the **shelf** over the **shelf sides**, secure with four **confirmat screws** and you are finished.

